

Tuple-based Coordination: From Linda to A&A ReSpecT

Advanced Topics in Agent-Oriented Computing

Andrea Omicini
`andrea.omicini@unibo.it`

ALMA MATER STUDIORUM—Università di Bologna a Cesena

ICT International Doctorate School, Trento, Italy, 2007



1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*


- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination



Coordination: Sketching a Meta-model

The *medium of coordination*

- “fills” the interaction space
- enables / promotes / governs the admissible / desirable / required interactions among the interacting entities
- according to some *coordination laws*
 - enacted by the behaviour of the medium
 - defining the semantics of coordination

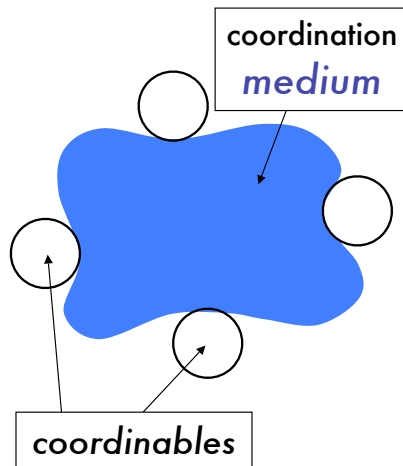

Coordination in Distributed Programming

Coordination model as a glue

A coordination model is the glue that binds separate activities into an ensemble [Gelernter and Carriero, 1992]

Coordination model as an agent interaction framework

A coordination model provides a framework in which the interaction of active and independent entities called agents can be expressed [Ciancarini, 1996]

Issues for a coordination model

A coordination model should cover the issues of creation and destruction of agents, communication among agents, and spatial distribution of agents, as well as synchronization and distribution of their actions over time [Ciancarini, 1996]



Coordination in Distributed Programming

Coordination model as a glue

A coordination model is the glue that binds separate activities into an ensemble [Gelernter and Carriero, 1992]

Coordination model as an agent interaction framework

A coordination model provides a framework in which the interaction of active and independent entities called agents can be expressed [Ciancarini, 1996]

Issues for a coordination model

A coordination model should cover the issues of creation and destruction of agents, communication among agents, and spatial distribution of agents, as well as synchronization and distribution of their actions over time [Ciancarini, 1996]



Coordination in Distributed Programming

Coordination model as a glue

A coordination model is the glue that binds separate activities into an ensemble [Gelernter and Carriero, 1992]

Coordination model as an agent interaction framework

A coordination model provides a framework in which the interaction of active and independent entities called agents can be expressed [Ciancarini, 1996]

Issues for a coordination model

A coordination model should cover the issues of creation and destruction of agents, communication among agents, and spatial distribution of agents, as well as synchronization and distribution of their actions over time [Ciancarini, 1996]

Coordination in Distributed Programming

Coordination model as a glue

A coordination model is the glue that binds separate activities into an ensemble [Gelernter and Carriero, 1992]

Coordination model as an agent interaction framework

A coordination model provides a framework in which the interaction of active and independent entities called agents can be expressed [Ciancarini, 1996]

Issues for a coordination model

A coordination model should cover the issues of creation and destruction of agents, communication among agents, and spatial distribution of agents, as well as synchronization and distribution of their actions over time [Ciancarini, 1996]

Coordination: A Meta-model [Ciancarini, 1996]

A constructive approach

Which are the components of a coordination system?

Coordination entities Entities whose mutual interaction is ruled by the model, also called the *coordinables*

Coordination media Abstractions enabling and ruling agent interactions

Coordination laws Rules defining the behaviour of the coordination media in response to interaction



Coordination: A Meta-model [Ciancarini, 1996]

A constructive approach

Which are the components of a coordination system?

Coordination entities Entities whose mutual interaction is ruled by the model, also called the *coordinables*

Coordination media Abstractions enabling and ruling agent interactions

Coordination laws Rules defining the behaviour of the coordination media in response to interaction



Coordination: A Meta-model [Ciancarini, 1996]

A constructive approach

Which are the components of a coordination system?

Coordination entities Entities whose mutual interaction is ruled by the model, also called the *coordinables*

Coordination media Abstractions enabling and ruling agent interactions

Coordination laws Rules defining the behaviour of the coordination media in response to interaction



Coordination: A Meta-model [Ciancarini, 1996]

A constructive approach

Which are the components of a coordination system?

Coordination entities Entities whose mutual interaction is ruled by the model, also called the *coordinables*

Coordination media Abstractions enabling and ruling agent interactions

Coordination laws Rules defining the behaviour of the coordination media in response to interaction



Coordination: A Meta-model [Ciancarini, 1996]

A constructive approach

Which are the components of a coordination system?

Coordination entities Entities whose mutual interaction is ruled by the model, also called the *coordinables*

Coordination media Abstractions enabling and ruling agent interactions

Coordination laws Rules defining the behaviour of the coordination media in response to interaction



Coordinables

Original definition [Ciancarini, 1996]

These are the entity types that are coordinated. These could be Unix-like processes, threads, concurrent objects and the like, and even users.

examples Processes, threads, objects, human users, agents, ...

focus Observable behaviour of the coordinables

question Are we anyhow concerned here with the internal machinery / functioning of the coordinable, in principle?

→ This issue will be clear when comparing Linda & TuCSoN agents



Coordinables

Original definition [Ciancarini, 1996]

These are the entity types that are coordinated. These could be Unix-like processes, threads, concurrent objects and the like, and even users.

examples Processes, threads, objects, human users, agents, ...

focus Observable behaviour of the coordinables

question Are we anyhow concerned here with the internal machinery / functioning of the coordinable, in principle?

→ This issue will be clear when comparing Linda & TuCSoN agents



Coordinables

Original definition [Ciancarini, 1996]

These are the entity types that are coordinated. These could be Unix-like processes, threads, concurrent objects and the like, and even users.

examples Processes, threads, objects, human users, agents, ...

focus Observable behaviour of the coordinables

question Are we anyhow concerned here with the internal machinery / functioning of the coordinable, in principle?

→ This issue will be clear when comparing Linda & TuCSoN agents



Coordinables

Original definition [Ciancarini, 1996]

These are the entity types that are coordinated. These could be Unix-like processes, threads, concurrent objects and the like, and even users.

examples Processes, threads, objects, human users, agents, ...

focus Observable behaviour of the coordinables

question Are we anyhow concerned here with the internal machinery / functioning of the coordinable, in principle?

→ This issue will be clear when comparing Linda & TuCSoN agents



Coordinables

Original definition [Ciancarini, 1996]

These are the entity types that are coordinated. These could be Unix-like processes, threads, concurrent objects and the like, and even users.

examples Processes, threads, objects, human users, agents, ...

focus Observable behaviour of the coordinables

question Are we anyhow concerned here with the internal machinery / functioning of the coordinable, in principle?

→ This issue will be clear when comparing Linda & TuCSoN agents



Coordination media

Original definition [Ciancarini, 1996]

These are the media making communication among the agents possible. Moreover, a coordination medium can serve to aggregate agents that should be manipulated as a whole. Examples are classic media such as semaphores, monitors, or channels, or more complex media such as tuple spaces, blackboards, pipelines, and the like.

examples Semaphors, monitors, channels, tuple spaces, blackboards, pipes,

...

focus The core around which the components of the system are organised

question Which are the possible computational models for coordination media?

→ This issue will be clear when comparing Linda tuple spaces & ReSpecT tuple centres



Coordination media

Original definition [Ciancarini, 1996]

These are the media making communication among the agents possible. Moreover, a coordination medium can serve to aggregate agents that should be manipulated as a whole. Examples are classic media such as semaphores, monitors, or channels, or more complex media such as tuple spaces, blackboards, pipelines, and the like.

examples Semaphors, monitors, channels, tuple spaces, blackboards, pipes,

...

focus The core around which the components of the system are organised

question Which are the possible computational models for coordination media?

→ This issue will be clear when comparing Linda tuple spaces & ReSpecT tuple centres



Coordination media

Original definition [Ciancarini, 1996]

These are the media making communication among the agents possible. Moreover, a coordination medium can serve to aggregate agents that should be manipulated as a whole. Examples are classic media such as semaphores, monitors, or channels, or more complex media such as tuple spaces, blackboards, pipelines, and the like.

examples Semaphors, monitors, channels, tuple spaces, blackboards, pipes,

...

focus The core around which the components of the system are organised

question Which are the possible computational models for coordination media?

→ This issue will be clear when comparing Linda tuple spaces & ReSpecT tuple centres



Coordination media

Original definition [Ciancarini, 1996]

These are the media making communication among the agents possible. Moreover, a coordination medium can serve to aggregate agents that should be manipulated as a whole. Examples are classic media such as semaphores, monitors, or channels, or more complex media such as tuple spaces, blackboards, pipelines, and the like.

examples Semaphors, monitors, channels, tuple spaces, blackboards, pipes,

...

focus The core around which the components of the system are organised

question Which are the possible computational models for coordination media?

→ This issue will be clear when comparing Linda tuple spaces & ReSpecT tuple centres



Coordination media

Original definition [Ciancarini, 1996]

These are the media making communication among the agents possible. Moreover, a coordination medium can serve to aggregate agents that should be manipulated as a whole. Examples are classic media such as semaphores, monitors, or channels, or more complex media such as tuple spaces, blackboards, pipelines, and the like.

examples Semaphors, monitors, channels, tuple spaces, blackboards, pipes,

...

focus The core around which the components of the system are organised

question Which are the possible computational models for coordination media?

→ This issue will be clear when comparing Linda tuple spaces & ReSpecT tuple centres



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures
 - the *coordination language*, as the set of the admissible interaction primitives, along with their semantics



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures
 - the *coordination language*, as the set of the admissible interaction primitives, along with their semantics



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures
 - the *coordination language*, as the set of the admissible interaction primitives, along with their semantics



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures

examples: tuples, XML elements, FOL terms, (Java) objects, ...

- the *coordination language*, as the set of the admissible interaction primitives, along with their semantics

examples: in/out/rd (Linda), send/receive (channels), push/pull (pipes), ...



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures

examples tuples, XML elements, FOL terms, (Java) objects, ...

- the *coordination language*, as the set of the admissible interaction primitives, along with their semantics

examples in/out/rd (Linda), send/receive (channels), push/pull (pipes), ...



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures

examples tuples, XML elements, FOL terms, (Java) objects, ...

- the *coordination language*, as the set of the admissible interaction primitives, along with their semantics

examples in/out/rd (Linda), send/receive (channels), push/pull (pipes), ...



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
- Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures

examples tuples, XML elements, FOL terms, (Java) objects, ...

- the *coordination language*, as the set of the admissible interaction primitives, along with their semantics

examples in/out/rd (Linda), send/receive (channels), push/pull (pipes), ...



Coordination laws

Original definition [Ciancarini, 1996]

A coordination model should dictate a number of laws to describe how agents coordinate themselves through the given coordination media and using a number of coordination primitives. Examples are laws that enact either synchronous or asynchronous behaviors or exploit explicit or implicit naming schemes for coordination entities.

- Coordination laws define the behaviour of the coordination media in response to interaction
 - a notion of (admissible interaction) event is required to define a model
 - Coordination laws are expressed in terms of
 - the *communication language*, as the syntax used to express and exchange data structures

examples tuples, XML elements, FOL terms, (Java) objects, ...

 - the *coordination language*, as the set of the admissible interaction primitives, along with their semantics
- examples in/out/rd (Linda), send/receive (channels), push/pull (pipes), ...



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



The Tuple-space Meta-model

The basics

- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples



The Tuple-space Meta-model

The basics

- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples



The Tuple-space Meta-model

The basics

- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples



The Tuple-space Meta-model

The basics

- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples



The Tuple-space Meta-model

The basics


- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples



The Tuple-space Meta-model

The basics

- *Coordinables* synchronise, cooperate, compete
 - based on *tuples*
 - available in the *tuple space*
 - by *associatively* accessing, consuming and producing tuples

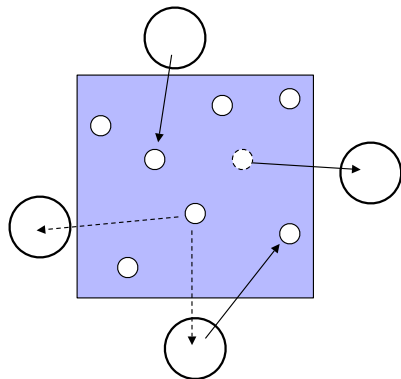

Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model [Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model
[Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model
[Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model
[Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model
[Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model [Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Tuple-based / Space-based Coordination Systems

Adopting the constructive coordination meta-model [Ciancarini, 1996]

coordination media tuple spaces

- as multiset / bag of data objects / structures called *tuples*

communication language tuples

- as ordered collections of (possibly heterogeneous) information items

coordination language tuple space primitives

- as a set of operations to put, browse and retrieve tuples to/from the space



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...

Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Communication Language [Gelernter, 1985]

Communication Language

tuples ordered collections of possibly heterogeneous information chunks

- examples: `p(1)`, `printer('HP',dpi(300))`, `[0,0.5]`, `matrix(m0,3,3,0.5)`, `tree_node(node00,value(13),left(_),right(node01))`, ...

templates / anti-tuples specifications of set / classes of tuples

- examples: `p(X)`, `[?int,?int]`, `tree_node(N)`, ...

tuple matching mechanism the mechanism matching tuples and templates

- examples: pattern matching, unification, ...



Linda: The Coordination Language [Gelernter, 1985] I

out(T)

- out(T) puts tuple T in to the tuple space

examples out(p(1)), out(0,0.5), out(course('Denti
Enrico','Poetry',hours(150)) ...



Linda: The Coordination Language [Gelernter, 1985] II

in(TT)

- `in(TT)` retrieves a tuple matching template TT from the tuple space

destructive reading the tuple retrieved is removed from the tuple centre

non-determinism if more than one tuple matches the template, one is chosen non-deterministically

suspensive semantics if no matching tuples are found in the tuple space, operation execution is suspended, and woken when a matching tuple is finally found

examples `in(p(X))`, `in(0,0.5)`, `in(course('Denti Enrico',Title,hours(X)) ...`

Linda: The Coordination Language [Gelernter, 1985] III

rd(TT)

- `rd(TT)` retrieves a tuple matching template `TT` from the tuple space

non-destructive reading the tuple retrieved is left untouched in the tuple centre

non-determinism if more than one tuple matches the template, one is chosen non-deterministically

suspensive semantics if no matching tuples are found in the tuple space, operation execution is suspended, and awakened when a matching tuple is finally found

examples `rd(p(X))`, `rd(0,0.5)`, `rd(course('Ricci Alessandro','Operating Systems',hours(X))) ...`



Linda Extensions: Predicative Primitives

`inp(TT)`, `rdp(TT)`

- both `inp(TT)` and `rdp(TT)` retrieve tuple `T` matching template `TT` from the tuple space
- `= in(TT)`, `rp(TT)` (non-)destructive reading, non-determinism, and syntax structure is maintained
- `≠ in(TT)`, `rp(TT)` suspensive semantics is lost: this *predicative* versions primitives just fail when no tuple matching `TT` is found in the tuple space
- success / failure predicative primitives introduce *success / failure semantics*: when a matching tuple is found, it is returned with a success result; when it is not, a failure is reported

Linda Extensions: Predicative Primitives

`inp(TT), rdp(TT)`

- both `inp(TT)` and `rdp(TT)` retrieve tuple `T` matching template `TT` from the tuple space

`= in(TT), rp(TT)` (non-)destructive reading, non-determinism, and syntax structure is maintained

`≠ in(TT), rp(TT)` suspensive semantics is lost: this *predicative* versions primitives just fail when no tuple matching `TT` is found in the tuple space
`success / failure` predicative primitives introduce *success / failure semantics*: when a matching tuple is found, it is returned with a success result; when it is not, a failure is reported



Linda Extensions: Predicative Primitives

`inp(TT), rdp(TT)`

- both `inp(TT)` and `rdp(TT)` retrieve tuple `T` matching template `TT` from the tuple space

= `in(TT), rp(TT)` (non-)destructive reading, non-determinism, and syntax structure is maintained

`≠in(TT), rp(TT)` suspensive semantics is lost: this *predicative* versions primitives just fail when no tuple matching `TT` is found in the tuple space
`success / failure` predicative primitives introduce *success / failure semantics*: when a matching tuple is found, it is returned with a success result; when it is not, a failure is reported



Linda Extensions: Predicative Primitives

`inp(TT)`, `rdp(TT)`

- both `inp(TT)` and `rdp(TT)` retrieve tuple `T` matching template `TT` from the tuple space
 - = `in(TT)`, `rp(TT)` (non-)destructive reading, non-determinism, and syntax structure is maintained
 - $\neq$ `in(TT)`, `rp(TT)` suspensive semantics is lost: this *predicative* versions primitives just fail when no tuple matching `TT` is found in the tuple space
- success / failure* predicative primitives introduce *success / failure semantics*: when a matching tuple is found, it is returned with a success result; when it is not, a failure is reported



Linda Extensions: Predicative Primitives

`inp(TT)`, `rdp(TT)`

- both `inp(TT)` and `rdp(TT)` retrieve tuple `T` matching template `TT` from the tuple space
 - `= in(TT)`, `rp(TT)` (non-)destructive reading, non-determinism, and syntax structure is maintained
 - `≠ in(TT)`, `rp(TT)` suspensive semantics is lost: this *predicative* versions primitives just fail when no tuple matching `TT` is found in the tuple space
- `success / failure` predicative primitives introduce *success / failure semantics*: when a matching tuple is found, it is returned with a success result; when it is not, a failure is reported



Linda Extensions: Bulk Primitives

`in_all(TT), rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT), in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT), in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT), rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT), in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT), in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT), rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT), in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT), in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Bulk Primitives

`in_all(TT)`, `rd_all(TT)`

- Linda primitives (including predicative ones) deal with a tuple at a time
 - some coordination problems require more than one tuple to be handled by a single primitive
- `rd_all(TT)`, `in_all(TT)` get all tuples in the tuple space matching with `TT`, and returns them all
 - no suspensive semantics: if no matching tuple is found, an empty collection is returned
 - no success / failure semantics: a collection of tuple is always successfully returned—possibly, an empty one
 - in case of logic-based primitives / tuples, the form of the primitive are `rd_all(TT,LT)`, `in_all(TT,LT)` (or equivalent), where the (possibly empty) list of tuples unifying with `TT` is unified with `LT`
 - (non-)destructive reading: `in_all(TT)` consumes all matching tuples in the tuple space; `rd_all(TT)` leaves the tuple space untouched
- Many other bulk primitives have been proposed and implemented to address particular classes of problems



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, ts@node ? out(p) may denote the invocation of operation out(p) over tuple space ts on node node



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Linda Extensions: Multiple Tuple Spaces

ts ? out(T)

- Linda tuple space might be a bottleneck for coordination
- Many extensions have focussed on making a multiplicity of tuple spaces available to agents
 - each of them encapsulating a portion of the coordination load
 - either hosted by a single machine, or distributed across the network
- Syntax required, and dependent on particular models and implementations
 - a space for tuple space names, possibly including network location
 - operators to associate Linda operators to tuple spaces
- For instance, `ts@node ? out(p)` may denote the invocation of operation `out(p)` over tuple space `ts` on node `node`



Main Features of Tuple-based Coordination

Main features of the Linda model

tuples A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort

generative communication until explicitly withdrawn, the tuples generated by coordinables have an independent existence in the tuple space; a tuple is equally accessible to all the coordinables, but is bound to none

associative access tuples in the tuple space are accessed through their content & structure, rather than by name, address, or location

suspensive semantics operations may be suspended based on unavailability of matching tuples, and be woken up when such tuples become available



Main Features of Tuple-based Coordination

Main features of the Linda model

tuples A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort

generative communication until explicitly withdrawn, the tuples generated by coordinables have an independent existence in the tuple space; a tuple is equally accessible to all the coordinables, but is bound to none

associative access tuples in the tuple space are accessed through their content & structure, rather than by name, address, or location

suspensive semantics operations may be suspended based on unavailability of matching tuples, and be woken up when such tuples become available



Main Features of Tuple-based Coordination

Main features of the Linda model

tuples A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort

generative communication until explicitly withdrawn, the tuples generated by coordinables have an independent existence in the tuple space; a tuple is equally accessible to all the coordinables, but is bound to none

associative access tuples in the tuple space are accessed through their content & structure, rather than by name, address, or location

suspensive semantics operations may be suspended based on unavailability of matching tuples, and be woken up when such tuples become available



Main Features of Tuple-based Coordination

Main features of the Linda model

tuples A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort

generative communication until explicitly withdrawn, the tuples generated by coordinables have an independent existence in the tuple space; a tuple is equally accessible to all the coordinables, but is bound to none

associative access tuples in the tuple space are accessed through their content & structure, rather than by name, address, or location

suspensive semantics operations may be suspended based on unavailability of matching tuples, and be woken up when such tuples become available



Main Features of Tuple-based Coordination

Main features of the Linda model

tuples A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort

generative communication until explicitly withdrawn, the tuples generated by coordinables have an independent existence in the tuple space; a tuple is equally accessible to all the coordinables, but is bound to none

associative access tuples in the tuple space are accessed through their content & structure, rather than by name, address, or location

suspensive semantics operations may be suspended based on unavailability of matching tuples, and be woken up when such tuples become available



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Tuples

- A tuple is an ordered collection of knowledge chunks, possibly heterogeneous in sort
 - a record-like structure
 - with no need of field names
 - easy aggregation of knowledge
 - semantic interpretation: a tuple contains all information concerning an given item
- Tuple structure based on
 - arity
 - type
 - position
 - information content
- Anti-tuples / Tuple templates
 - to describe / define sets of tuples
- Matching mechanism
 - to define belongingness to a set



Features of Linda: Generative Communication

- *Communication orthogonality*: both senders and the receivers can interact even without having prior knowledge about each others
 - space uncoupling (also called distributed naming): no need to coexist in space for two agents to interact
 - time uncoupling : no need for simultaneity for two agents to interact
 - name uncoupling: no need for names for agents to interact



Features of Linda: Generative Communication

- *Communication orthogonality*: both senders and the receivers can interact even without having prior knowledge about each others
 - space uncoupling (also called distributed naming): no need to coexist in space for two agents to interact
 - time uncoupling : no need for simultaneity for two agents to interact
 - name uncoupling: no need for names for agents to interact



Features of Linda: Generative Communication

- *Communication orthogonality*: both senders and the receivers can interact even without having prior knowledge about each others
 - space uncoupling (also called distributed naming): no need to coexist in space for two agents to interact
 - time uncoupling : no need for simultaneity for two agents to interact
 - name uncoupling: no need for names for agents to interact



Features of Linda: Generative Communication

- *Communication orthogonality*: both senders and the receivers can interact even without having prior knowledge about each others
 - space uncoupling (also called distributed naming): no need to coexist in space for two agents to interact
 - time uncoupling : no need for simultaneity for two agents to interact
 - name uncoupling: no need for names for agents to interact



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Associative Access

- *Content-based coordination*: synchronisation based on tuple content & structure
 - absence / presence of tuples with some content / structure determines the overall behaviour of the coordinables, and of the coordinated system in the overall
 - based on tuple templates & matching mechanism
- *Information-driven coordination*
 - patterns of coordination based on data / information availability
 - based on tuple templates & matching mechanism
- *Reification*
 - making events become tuples
 - grouping classes of events with tuple syntax, and accessing them via tuple templates



Features of Linda: Suspensive Semantics

- **in & rd primitives in Linda have a suspensive semantics**
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- **Twofold wait**
 - in the coordination medium the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set
 - in the coordination entity the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable



Features of Linda: Suspensive Semantics

- `in` & `rd` primitives in Linda have a suspensive semantics
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- Twofold wait

in the coordination medium the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set

in the coordination entity the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable



Features of Linda: Suspensive Semantics

- `in` & `rd` primitives in Linda have a suspensive semantics
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- Twofold wait

in the coordination medium the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set

in the coordination entity the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable



Features of Linda: Suspensive Semantics

- `in` & `rd` primitives in Linda have a suspensive semantics
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- Twofold wait

in the coordination medium the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set

in the coordination entity the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable

Features of Linda: Suspensive Semantics

- `in` & `rd` primitives in Linda have a suspensive semantics
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- Twofold wait
 - in the coordination medium the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set
 - in the coordination entity the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable



Features of Linda: Suspensive Semantics

- `in` & `rd` primitives in Linda have a suspensive semantics
 - the coordination medium makes the primitives waiting in case a matching tuple is not found, and wakes it up when such a tuple is found
 - the coordinable invoking the suspensive primitive is expected to wait for its successful completion
- Twofold wait
 - in the **coordination medium** the operation is first (possibly) suspended, then (possibly) served: coordination based on absence / presence of tuples belonging to a given set
 - in the **coordination entity** the invocation may cause a wait-state in the invoker: hypothesis on the internal behaviour of the coordinable



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Our Running Example: The Dining Philosophers Problem

Dining Philosophers [Dijkstra, 2002]

- In the classical Dining Philosopher problem, N philosopher agents share N chopsticks and a spaghetti bowl
- Each philosopher either eats or thinks
- Each philosopher needs a pair of chopsticks to eat—and can access the two chopsticks on his left and on his right
- Each chopstick is shared by two adjacent philosophers
- When a philosopher needs to think, he gets rid of chopsticks



Concurrency issues in the Dining Philosophers Problem

Issues

shared resources Two adjacent philosophers cannot eat simultaneously

starvation If one philosopher eats all the time, the two adjacent philosophers will starve

deadlock If every philosopher picks up the same (say, the left) chopstick at the same time, all of them may wait indefinitely for the other (say, the right) chopstick so as to eat

fairness If a philosopher releases one chopstick before the other one, it favours one of his adjacent philosophers over the other one



Concurrency issues in the Dining Philosophers Problem

Issues

shared resources Two adjacent philosophers cannot eat simultaneously

starvation If one philosopher eats all the time, the two adjacent philosophers will starve

deadlock If every philosopher picks up the same (say, the left) chopstick at the same time, all of them may wait indefinitely for the other (say, the right) chopstick so as to eat

fairness If a philosopher releases one chopstick before the other one, it favours one of his adjacent philosophers over the other one



Concurrency issues in the Dining Philosophers Problem

Issues

shared resources Two adjacent philosophers cannot eat simultaneously

starvation If one philosopher eats all the time, the two adjacent philosophers will starve

deadlock If every philosopher picks up the same (say, the left) chopstick at the same time, all of them may wait indefinitely for the other (say, the right) chopstick so as to eat

fairness If a philosopher releases one chopstick before the other one, it favours one of his adjacent philosophers over the other one



Concurrency issues in the Dining Philosophers Problem

Issues

shared resources Two adjacent philosophers cannot eat simultaneously

starvation If one philosopher eats all the time, the two adjacent philosophers will starve

deadlock If every philosopher picks up the same (say, the left) chopstick at the same time, all of them may wait indefinitely for the other (say, the right) chopstick so as to eat

fairness If a philosopher releases one chopstick before the other one, it favours one of his adjacent philosophers over the other one



Concurrency issues in the Dining Philosophers Problem

Issues

shared resources Two adjacent philosophers cannot eat simultaneously

starvation If one philosopher eats all the time, the two adjacent philosophers will starve

deadlock If every philosopher picks up the same (say, the left) chopstick at the same time, all of them may wait indefinitely for the other (say, the right) chopstick so as to eat

fairness If a philosopher releases one chopstick before the other one, it favours one of his adjacent philosophers over the other one



Dining Philosophers in Linda

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by the tuple space
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- Philosophers try to eat by getting their chopstick pairs from the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$
- Philosophers start to think by releasing their own chopstick pairs to the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$



Dining Philosophers in Linda

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by the tuple space
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- Philosophers try to eat by getting their chopstick pairs from the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$
- Philosophers start to think by releasing their own chopstick pairs to the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$



Dining Philosophers in Linda

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by the tuple space
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- Philosophers try to eat by getting their chopstick pairs from the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$
- Philosophers start to think by releasing their own chopstick pairs to the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$



Dining Philosophers in Linda

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by the tuple space
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- Philosophers try to eat by getting their chopstick pairs from the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$
- Philosophers start to think by releasing their own chopstick pairs to the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$



Dining Philosophers in Linda

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by the tuple space
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- Philosophers try to eat by getting their chopstick pairs from the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$
- Philosophers start to think by releasing their own chopstick pairs to the tuple space as a pair of tuples $\text{chop}(i) \text{ chop}(i+1 \bmod N)$



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible

Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),          % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),          % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible

Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),           % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible

Dining Philosophers in Linda: A Simple Philosopher Protocol

Philosopher using ins and outs

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chop(I)), in(chop(J)),             % waiting to eat  
    eat,                                  % eating  
    out(chop(I)), out(chop(J)),          % waiting to think  
    !, philosopher(I,J).
```

Issues

- + shared resources handled correctly
- starvation, deadlock and unfairness still possible



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),          % waiting to eat
    ( inp(chop(J)),       % if other chop available
      eat,                % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                  % otherwise
      out(chop(I))        % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),          % waiting to eat
    ( inp(chop(J)),       % if other chop available
      eat,                % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                  % otherwise
      out(chop(I))        % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                   % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                   % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                  % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                  % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                  % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    (   inp(chop(J)),                    % if other chop available
        eat,                             % eating
        out(chop(I)), out(chop(J)),      % waiting to think
        ;                                % otherwise
        out(chop(I))                    % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                   % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                       % if other chop available
      eat,                                % eating
      out(chop(I)), out(chop(J)),        % waiting to think
      ;                                   % otherwise
      out(chop(I))                       % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                                % thinking
    in(chop(I)),                          % waiting to eat
    ( inp(chop(J)),                      % if other chop available
      eat,                               % eating
      out(chop(I)), out(chop(J)),       % waiting to think
      ;                                 % otherwise
      out(chop(I))                      % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda: Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),           % waiting to eat
    ( inp(chop(J)),        % if other chop available
      eat,                 % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                   % otherwise
      out(chop(I))         % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly; deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),           % waiting to eat
    ( inp(chop(J)),        % if other chop available
      eat,                 % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                   % otherwise
      out(chop(I))         % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),          % waiting to eat
    ( inp(chop(J)),       % if other chop available
      eat,                % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                  % otherwise
      out(chop(I))        % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),           % waiting to eat
    ( inp(chop(J)),        % if other chop available
      eat,                 % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                   % otherwise
      out(chop(I))         % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```
philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),           % waiting to eat
    ( inp(chop(J)),        % if other chop available
      eat,                 % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                   % otherwise
      out(chop(I))         % releasing unused chop
    )
!, philosopher(I,J).
```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),          % waiting to eat
    ( inp(chop(J)),       % if other chop available
      eat,                % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                   % otherwise
      out(chop(I))        % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda:

Another Philosopher Protocol

Philosopher using ins, inps and outs

```

philosopher(I,J) :-
    think,                % thinking
    in(chop(I)),          % waiting to eat
    ( inp(chop(J)),       % if other chop available
      eat,                % eating
      out(chop(I)), out(chop(J)), % waiting to think
      ;                  % otherwise
      out(chop(I))        % releasing unused chop
    )
!, philosopher(I,J).

```

Issues

- + shared resources handled correctly, deadlock possibly avoided
- starvation and unfairness still possible
- not-so-trivial philosopher's interaction protocol
 - part of the coordination load is on the coordinables
 - rather than on the coordination medium



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-
```

```
    think,                                % thinking
```

```
    in(chops(I,J)),                       % waiting to eat
```

```
    eat,                                  % eating
```

```
    out(chops(I,J)),                      % waiting to think
```

```
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-
```

```
    think,                                % thinking
```

```
    in(chops(I,J)),                       % waiting to eat
```

```
    eat,                                  % eating
```

```
    out(chops(I,J)),                     % waiting to think
```

```
!, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chops(I,J)),                       % waiting to eat  
    eat,                                  % eating  
    out(chops(I,J)),                      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chops(I,J)),                       % waiting to eat  
    eat,                                  % eating  
    out(chops(I,J)),                      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                                % thinking  
    in(chops(I,J)),                       % waiting to eat  
    eat,                                  % eating  
    out(chops(I,J)),                     % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
 - shared resources not handled properly
 - starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Yet Another Philosopher Protocol

Philosopher using ins and outs with chopstick pairs chops(I,J)

```
philosopher(I,J) :-  
    think,                % thinking  
    in(chops(I,J)),       % waiting to eat  
    eat,                  % eating  
    out(chops(I,J)),      % waiting to think  
    !, philosopher(I,J).
```

Issues

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- shared resources not handled properly
- starvation still possible



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Linda: Where is the Problem?

- Coordination is limited to writing, reading, consuming, suspending on one tuple at a time
 - the behaviour of the coordination medium is fixed once and for all
 - coordination problems that fits it are solved satisfactorily, those that do not fit are not
- Bulk primitives are not a general-purpose solution
 - adding ad hoc primitives does not solve the problem in general
 - and does not fit open scenarios—where instead a limited number of well-known primitives are the perfect solution
- As a result, the coordination load is typically charged upon coordination entities
 - this does not fit open scenarios
 - neither it does follow basic software engineering principles, like encapsulation and locality



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Dining Philosophers in Tuple-based Models: Solution?

- The behaviour of the coordination medium should be *adjustable* according to the coordination problem
 - the behaviour of the coordination medium should *not* be fixed once and for all
 - all coordination problems should fits some admissible behaviour of the coordination medium
 - with no need to either add new *ad hoc* primitives, or change the semantics of the old ones
- In this way, coordination media could *encapsulate* solutions to coordination problems
 - represented in terms of coordination policies
 - enacted in terms of coordinative behaviour of the coordination media
- What is needed is a way to *define the behaviour* of a coordination medium according to the specific coordination issues
 - a general *computational model for coordination media*
 - along with a suitably expressive *programming language* to define the behaviour of coordination media



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven* coordination vs. *action-driven* coordination clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - *data-driven coordination vs. control-driven coordination*
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven coordination vs. action-driven coordination* clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven* coordination vs. *action-driven* coordination clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven coordination vs. action-driven coordination* clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven* coordination vs. *action-driven* coordination clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven* coordination vs. *action-driven* coordination clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Data- vs. Control-driven Coordination

- What if we need to start an activity after, say, at least N agents have asked for a resource?
 - More generally, what if we need, in general, to coordinate based on the coordinable actions, rather than on the information available / exchanged?
- Classical distinction in the coordination community
 - data-driven coordination vs. control-driven coordination
- Of course, this does not fit our agent / A&A framework, where (passage of) control is blacklisted
 - *information-driven* coordination vs. *action-driven* coordination clearly fits better
 - but we might as well use the old terms, while we understand their limitations



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid* coordination models
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid coordination models*
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid coordination models*
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid* coordination models
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid* coordination models
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid* coordination models
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Hybrid Coordination Models

- Generally speaking, control-driven coordination does not fit so well information-driven contexts, like agent-based ones
 - control-driven models like Reo [Arbab, 2004] need to be adapted to agent-based contexts, mainly to deal with the issue of agent autonomy [Dastani et al., 2005]
 - no coordination medium could say “do this, do that” to a coordinated entity, when a coordinable is an agent
- We need features of both approaches to coordination
 - *hybrid* coordination models
 - adding for instance a control-driven layer to a Linda-based one
- What should be added to a tuple-based model to make it hybrid, and how?



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side?
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side?
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side?
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side?
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Towards Tuple Centres

- What should be left unchanged?
 - no new primitives
 - basic Linda primitives are preserved, both syntax and semantics
 - matching mechanism preserved, still depending on the communication language of choice
 - multiple tuple spaces, flat name space
- New features from the coordination side
 - ability to define new coordinative behaviours embodying required coordination policies
 - ability to associate coordinative behaviours to coordination events
- New features from the artifact side
 - the list deriving from the interpretation of coordination media as coordination artifacts



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability observing / controlling tuple space structure, state & behaviour
 - for the monitoring / debugging purposes
 - malleability / forgeability adapting / changing tuple space function / state & behaviour
 - for the extension of development, but also for run-time adaptation to changes
 - linkability & distribution composing distributed tuple spaces
 - for the support of the separation of concerns, distribution & mobility
 - situation reacting to environment events & changes
 - according to other agents rather than descriptions of coordination capabilities



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability observing / controlling tuple space structure, state & behaviour
 - e.g. for monitoring / debugging purposes
 - malleability / forgeability adapting / changing tuple space function / state & behaviour
 - e.g. for extension of development, but also for run-time adaptation to changing situations
 - linkability & distribution composing distributed tuple spaces
 - e.g. for distributed or the separation of concerns, distributedness & modularity
 - situation reacting to environment events & changes
 - e.g. reacting to other agents rather than abstractions of coordination capabilities



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability observing / controlling tuple space structure, state & behaviour
 - malleability / forgeability adapting / changing tuple space function / state & behaviour
 - linkability & distribution composing distributed tuple spaces
 - situation reacting to environment events & changes



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability observing / controlling tuple space structure, state & behaviour
 - flexibility / adaptability adapting / changing tuple space function / state & behaviour
 - malleability / forgeability adapting / changing tuple space function / state & behaviour
 - compositionality composing distributed tuple spaces
 - linkability & distribution composing distributed tuple spaces
 - reactivity reacting to environment events & changes
 - situation reacting to environment events & changes
 - reusability reusing the abstractions of coordination, for coordination & modelling



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Feature List: From A&A to Tuple-based Coordination

- Coordinable are agents
 - tuple-space coordination primitives are (communication / pragmatical) actions
- Coordination abstractions are artifacts
 - tuple spaces as specialised artifacts for agent coordination
- Some relevant features of (coordination) artifacts
 - inspectability & controllability** observing / controlling tuple space structure, state & behaviour
 - for monitoring / debugging purposes
 - malleability / forgeability** adapting / changing tuple space function / state & behaviour
 - for incremental development, but also for run-time adaptation & change
 - linkability & distribution** composing distributed tuple spaces
 - for separation of concerns, encapsulation & scalability
 - situation** reacting to environment events & changes
 - reacting to other events rather than invocations of coordination primitives



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j))$ / $\text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j))$ / $\text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



Ideas from the Dining Philosophers

- ① Keeping information representation and perception separated
 - in the tuple space
 - this would enable agent interaction protocols to be organised around the desired / required agent perception of the interaction space (tuple space), independently of its *actual* representation in terms of tuples
- ② Properly relating information representation and perception through a suitably defined tuple-space behaviour
 - so, agents could get rid of the unnecessary burden of coordination, by embedding coordination laws into the coordination media

In the Dining Philosophers example...

- ... this would amount to representing each chopstick as a single $\text{chop}(i)$ tuple in the tuple space, while enabling philosopher agents to perceive chopsticks as pairs (tuples $\text{chops}(i, j)$), so that agent could acquire / release two chopsticks by means of a single tuple space operation $\text{in}(\text{chops}(i, j)) / \text{out}(\text{chops}(i, j))$.
- How could we do that, in the example, and in general?



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - 1 maintaining the standard tuple space interface
 - 2 making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



A Possible Solution

- A twofold solution
 - ① maintaining the standard tuple space interface
 - ② making it possible to enrich the behaviour of a tuple space in terms of the state transitions performed in response to the occurrence of standard communication events
- This is the motivation behind the very notion of *tuple centre*
 - a tuple space whose behaviour in response to communication events is no longer fixed once and for all by the coordination model, but can be defined according to the required coordination policies

Consequences

- Since it has exactly the same interface, a tuple centre is perceived by agents as a standard tuple space
- However, since its behaviour can be specified so as to encapsulate the coordination rules governing agent interaction, a tuple centre may behave in a completely different way with respect to a tuple space



Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre

Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre

Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre

Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre

Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre

Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre



Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre



Tuple Centres

Definition [Omicini and Denti, 2001]

- A tuple centre is a tuple space enhanced with a *behaviour specification*, defining the behaviour of a tuple centre in response to interaction events
- The *behaviour specification* of tuple centre
 - is expressed in terms of a *reaction specification language*, and
 - associates any tuple-centre event to a (possibly empty) set of computational activities, which are called *reactions*
- More precisely, a reaction specification language
 - enables the definitions of computational activities within a tuple centre, called reactions, and
 - makes it possible to associate reactions to the events that occur in a tuple centre



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reactions

- Each reaction can in principle
 - access and modify the current tuple centre state—like adding or removing tuples)
 - access the information related to the triggering event—such as the performing agent, the primitive invoked, the tuple involved, etc.)—which is made completely observable
 - invoke link primitives upon other tuple centres
- As a result, the semantics of the standard tuple space communication primitives is no longer constrained to be as simple as in the Linda model—i.e., adding, reading, and removing tuples
 - instead, it can be made as complex as required by the specific application needs



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Reaction Execution

- The main cycle of a tuple centre works as follows
 - when a primitive invocation reaches a tuple centre, all the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the primitive is served in the same way as in standard Linda
 - upon completion of the invocation, the corresponding reactions (if any) are triggered, and then executed in a non-deterministic order
 - once all the reactions have been executed, the main cycle of a tuple centre may go on possibly serving another invocation
- As a result, tuple centres exhibit a couple of fundamental features
 - since an empty behaviour specification brings no triggered reactions independently of the invocation, the behaviour of a tuple centre defaults to a tuple space when no behaviour specification is given
 - from the agent's viewpoint, the result of the invocation of a tuple centre primitive is the sum of the effects of the primitive itself and of all the reactions it triggers, perceived altogether as a single-step transition of the tuple centre state



Tuple Centre's State vs. Agent's Perception

- Reactions are executed in such a way that the observable behaviour of a tuple centre in response to a communication event is still perceived by agents as a single-step transition of the tuple-centre state
 - as in the case of tuple spaces
 - so tuple centres are perceived as tuple spaces by agents
- Unlike a standard tuple space, whose state transitions are constrained to adding, reading or deleting one single tuple, the perceived transition of a tuple centre state can be made as complex as needed
 - this makes it possible to decouple the agent's view of the tuple centre (perceived as a standard tuple space) from the actual state of a tuple centre, and to relate them so as to embed the coordination laws governing the multiagent system



Tuple Centre's State vs. Agent's Perception

- Reactions are executed in such a way that the observable behaviour of a tuple centre in response to a communication event is still perceived by agents as a single-step transition of the tuple-centre state
 - as in the case of tuple spaces
 - so tuple centres are perceived as tuple spaces by agents
- Unlike a standard tuple space, whose state transitions are constrained to adding, reading or deleting one single tuple, the perceived transition of a tuple centre state can be made as complex as needed
 - this makes it possible to decouple the agent's view of the tuple centre (perceived as a standard tuple space) from the actual state of a tuple centre, and to relate them so as to embed the coordination laws governing the multiagent system



Tuple Centre's State vs. Agent's Perception

- Reactions are executed in such a way that the observable behaviour of a tuple centre in response to a communication event is still perceived by agents as a single-step transition of the tuple-centre state
 - as in the case of tuple spaces
 - so tuple centres are perceived as tuple spaces by agents
- Unlike a standard tuple space, whose state transitions are constrained to adding, reading or deleting one single tuple, the perceived transition of a tuple centre state can be made as complex as needed
 - this makes it possible to decouple the agent's view of the tuple centre (perceived as a standard tuple space) from the actual state of a tuple centre, and to relate them so as to embed the coordination laws governing the multiagent system



Tuple Centre's State vs. Agent's Perception

- Reactions are executed in such a way that the observable behaviour of a tuple centre in response to a communication event is still perceived by agents as a single-step transition of the tuple-centre state
 - as in the case of tuple spaces
 - so tuple centres are perceived as tuple spaces by agents
- Unlike a standard tuple space, whose state transitions are constrained to adding, reading or deleting one single tuple, the perceived transition of a tuple centre state can be made as complex as needed
 - this makes it possible to decouple the agent's view of the tuple centre (perceived as a standard tuple space) from the actual state of a tuple centre, and to relate them so as to embed the coordination laws governing the multiagent system



Tuple Centre's State vs. Agent's Perception

- Reactions are executed in such a way that the observable behaviour of a tuple centre in response to a communication event is still perceived by agents as a single-step transition of the tuple-centre state
 - as in the case of tuple spaces
 - so tuple centres are perceived as tuple spaces by agents
- Unlike a standard tuple space, whose state transitions are constrained to adding, reading or deleting one single tuple, the perceived transition of a tuple centre state can be made as complex as needed
 - this makes it possible to decouple the agent's view of the tuple centre (perceived as a standard tuple space) from the actual state of a tuple centre, and to relate them so as to embed the coordination laws governing the multiagent system



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Tuple Centres & Hybrid Coordination

- Tuple centres promote a form of hybrid coordination
 - aimed at preserving the advantages of data-driven models
 - while addressing their limitations in terms of control capabilities
- On the one hand, a tuple centre is basically an information-driven coordination medium, which is perceived as such by agents
- On the other hand, a tuple centre also features some capabilities which are typical of action-driven models, like
 - the full observability of events
 - the ability to selectively react to events
 - the ability to implement coordination rules by manipulating the interaction space



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Dining Philosophers in ReSpecT

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by tuple centre table
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- An agent philosopher tries to eat by getting his chopstick pair from the tuple centre by means of a $\text{in}(\text{chops}(i, (i+1) \bmod N))$ invocation
- A philosopher starts to think by releasing his own chopstick pair to the tuple centre by means of a $\text{out}(\text{chops}(i, (i+1) \bmod N))$ invocation



Dining Philosophers in ReSpecT

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by tuple centre table
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i - *th* philosopher
 - philosopher i needs chopsticks i (left) and $(i + 1) \bmod N$ (right)
- An agent philosopher tries to eat by getting his chopstick pair from the tuple centre by means of a $\text{in}(\text{chops}(i, i+1 \bmod N))$ invocation
- A philosopher starts to think by releasing his own chopstick pair to the tuple centre by means of a $\text{out}(\text{chops}(i, i+1 \bmod N))$ invocation



Dining Philosophers in ReSpecT

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by tuple centre table
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- An agent philosopher tries to eat by getting his chopstick pair from the tuple centre by means of a $\text{in}(\text{chops}(i, i+1 \bmod N))$ invocation
- A philosopher starts to think by releasing his own chopstick pair to the tuple centre by means of a $\text{out}(\text{chops}(i, i+1 \bmod N))$ invocation



Dining Philosophers in ReSpecT

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by tuple centre table
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- An agent philosopher tries to eat by getting his chopstick pair from the tuple centre by means of a $\text{in}(\text{chops}(i, i+1 \bmod N))$ invocation
- A philosopher starts to think by releasing his own chopstick pair to the tuple centre by means of a $\text{out}(\text{chops}(i, i+1 \bmod N))$ invocation



Dining Philosophers in ReSpecT

- The spaghetti bowl, or, more easily, the table where the bowl and the chopstick are, and the philosophers are seated, are represented by tuple centre table
- Chopsticks are represented as tuples $\text{chop}(i)$, that represents the left chopstick for the i -th philosopher
 - philosopher i needs chopsticks i (left) and $(i+1) \bmod N$ (right)
- An agent philosopher tries to eat by getting his chopstick pair from the tuple centre by means of a $\text{in}(\text{chops}(i, i+1 \bmod N))$ invocation
- A philosopher starts to think by releasing his own chopstick pair to the tuple centre by means of a $\text{out}(\text{chops}(i, i+1 \bmod N))$ invocation



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```

philosopher(I,J) :-
    think,                                % thinking
    table ? in(chops(I,J)),              % waiting to eat
    eat,                                  % eating
    table ? out(chops(I,J)),              % waiting to think
    !, philosopher(I,J).

```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),              % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),             % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),              % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),             % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),              % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),             % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT: Philosopher Protocol

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),               % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),              % waiting to think  
    !, philosopher(I,J).
```

Results

- + fairness, no deadlock
- + trivial philosopher's interaction protocol
- ? shared resources handled properly?
- ? starvation still possible?



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) ).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT

table Behaviour Specification

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Dining Philosophers in ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

- starvation still possible



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre `seat(i,j)`
 - `seat(i,j)` denotes that the associated philosopher needs chopstick pair `chops(i,j)` so as to eat
- each chopstick i is represented as a tuple `chop(i)` in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple `wanna_eat` / `wanna_think` in his `seat(i,j)` tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts (`seat(i,j)`) + 1 social artifact (`table`) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre $\text{seat}(i, j)$
 - $\text{seat}(i, j)$ denotes that the associated philosopher needs chopstick pair $\text{chops}(i, j)$ so as to eat
- each chopstick i is represented as a tuple $\text{chop}(i)$ in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple wanna_eat / wanna_think in his $\text{seat}(i, j)$ tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts ($\text{seat}(i, j)$) + 1 social artifact (table) connected in a star network



Distributed Dining Philosophers

Dining Philosophers in a distributed setting

- N philosopher agents are distributed along the network
 - each philosopher is assigned a seat, represented by the tuple centre `seat(i, j)`
 - `seat(i, j)` denotes that the associated philosopher needs chopstick pair `chops(i, j)` so as to eat
- each chopstick i is represented as a tuple `chop(i)` in the table tuple centre
- each philosopher expresses his intention to eat / think by emitting a tuple `wanna_eat` / `wanna_think` in his `seat(i, j)` tuple centre
 - everything else is handled automatically in A&A ReSpecT, embedded in the tuple centre / artifact behaviour
- N individual artifacts (`seat(i, j)`) + 1 social artifact (`table`) connected in a star network



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the `table` tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the `table` tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the `table` tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the `table` tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



Distributed Dining Philosophers: Individual Interaction

Philosopher-seat interaction (*use*)

- four states, represented by tuple `philosopher(_)`
 - `thinking`, `waiting_to_eat`, `eating`, `waiting_to_think`
- determined by
 - the `out(wanna_eat)` / `out(wanna_think)` invocations, expressing the philosopher's intentions
 - the interaction with the table tuple centre, expressing the availability of chop resources
- tuple `chops(i,j)` only occurs in tuple centre `seat(i,j)` in the `philosopher(eating)` state
- state transitions only occur when they are safe
 - from `waiting_to_think` to `thinking` only when chopsticks are safely back on the table
 - from `waiting_to_eat` to `eating` only when chopsticks are actually at the seat



A&A ReSpecT code

seat(i, j) tuple centres

```

reaction( out(wanna_eat), (operation, invocation), (           % (1)
    in(philosopher(thinking)), out(philosopher(waiting_to_eat)),
    current_target(seat(C1,C2)), table@node ? in(chops(C1,C2)) )).
reaction( out(wanna_eat), (operation, completion),           % (2)
    in(wanna_eat)).
reaction( in(chops(C1,C2)), (link_out, completion), (         % (3)
    in(philosopher(waiting_to_eat)), out(philosopher(eating)),
    out(chops(C1,C2)) )).
reaction( out(wanna_think), (operation, invocation), (        % (4)
    in(philosopher(eating)), out(philosopher(waiting_to_think)),
    current_target(seat(C1,C2)), in(chops(C1,C2)),
    table@node ? out(chops(C1,C2)) )).
reaction( out(wanna_think), (operation, completion),          % (5)
    in(wanna_think) ).
reaction( out(chops(C1,C2)), (link_out, completion), (        % (6)
    in(philosopher(waiting_to_think)), out(philosopher(thinking)) ).

```



Distributed Dining Philosophers: Social Interaction

Seat-table interaction (*link*)

- tuple centre $\text{seat}(i,j)$ requires / returns tuple $\text{chops}(i,j)$ from / to table tuple centre
- tuple centre table transforms tuple $\text{chops}(i,j)$ into a tuple pair $\text{chop}(i), \text{chop}(j)$ whenever required, and back $\text{chop}(i), \text{chop}(j)$ into $\text{chops}(i,j)$ whenever required and possible



Distributed Dining Philosophers: Social Interaction

Seat-table interaction (*link*)

- tuple centre `seat(i,j)` requires / returns tuple `chops(i,j)` from / to table tuple centre
- tuple centre `table` transforms tuple `chops(i,j)` into a tuple pair `chop(i), chop(j)` whenever required, and back `chop(i), chop(j)` into `chops(i,j)` whenever required and possible



Distributed Dining Philosophers: Social Interaction

Seat-table interaction (*link*)

- tuple centre `seat(i,j)` requires / returns tuple `chops(i,j)` from / to table tuple centre
- tuple centre table transforms tuple `chops(i,j)` into a tuple pair `chop(i), chop(j)` whenever required, and back `chop(i), chop(j)` into `chops(i,j)` whenever required and possible



A&A ReSpecT code

```
table tuple centre
```

```

reaction( out(chops(C1,C2)), (link_in, completion), (           % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (link_in, invocation), (           % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (link_in, completion), (           % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                     % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                             % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)),
    out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                             % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)),
    out(chops(C1,C)) ).

```



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (table tuple centre)
 - the social artifact (table tuple centre) deals with shared resources (chop tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed coordination, the state of single agents is local in individual local coordinations
 - accessible, represented in a declarative way
 - the state of individual philosophers is provided through explicit local coordinations, the global representation is provided through the table



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the global distributed state
 - otherwise, the state of single agents is fully reflected in the global state
 - accessible, represented in a declarative way



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the global shared resources is in the `table` distributed artifact
 - distributed, the state of single agents is local in the `seat` local artifact
 - accessible, represented in a declarative way



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - each resource is in the domain of exactly one artifact, the state of each agent is local to each agent
 - accessible, represented in a declarative way



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed abstraction, the state of single agents is into individual local abstractions
 - accessible, represented in a declarative way
 - the state of individual philosophers is exposed through accessible artifacts as far as the portion representing their social interaction is concerned



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed abstraction, the state of single agents is into individual local abstractions
 - accessible, represented in a declarative way
 - the state of individual philosophers is exposed through accessible artifacts as far as the portion representing their social interaction is concerned



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed abstraction, the state of single agents is into individual local abstractions
 - accessible, represented in a declarative way
 - the state of individual philosophers is exposed through accessible artifacts as far as the portion representing their social interaction is concerned



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed abstraction, the state of single agents is into individual local abstractions
 - accessible, represented in a declarative way
 - the state of individual philosophers is exposed through accessible artifacts as far as the portion representing their social interaction is concerned



Distributed Dining Philosophers: Features

- Full separation of concerns
 - philosopher agents just express their intentions, in terms of simple tuples
 - individual artifacts (`seat(i,j)` tuple centres) handle individual behaviours and state, and mediate interaction of individuals with social artifacts (`table` tuple centre)
 - the social artifact (`table` tuple centre) deals with shared resources (`chop` tuples) and ensures global system properties, like fairness and deadlock avoidance
- At any time, one could look at the coordination artifacts, and find exactly the consistent representation of the current distributed state
 - properly distributed, suitably encapsulated
 - the state of shared resources is in the shared distributed abstraction, the state of single agents is into individual local abstractions
 - accessible, represented in a declarative way
 - the state of individual philosophers is exposed through accessible artifacts as far as the portion representing their social interaction is concerned



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers

- An example for situatedness in the spatio-temporal fabric
- table tuple centre stores the maximum amount of time for any agent (philosopher) to use the resource (to eat using chops)
 - in terms of a tuple `max_eating_time(@Time)`
 - if this time expires the locks are automatically released—chopsticks are re-inserted by the table tuple centre
 - late releases (by agents through seat tuple centres) are to be ignored—linkability used to make seat tuple centres consistent
- With a very simple extension using timed reactions, Distributed Timed Dining Philosophers are done
 - see [Omicini et al., 2005]



Timed Dining Philosophers: Philosopher

Philosophers' code

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),              % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),             % waiting to think  
    !, philosopher(I,J).
```

With respect to Dining Philosopher's protocol...

...this is left unchanged



Timed Dining Philosophers: Philosopher

Philosophers' code

```
philosopher(I,J) :-  
    think,                                % thinking  
    table ? in(chops(I,J)),              % waiting to eat  
    eat,                                  % eating  
    table ? out(chops(I,J)),             % waiting to think  
    !, philosopher(I,J).
```

With respect to Dining Philosopher's protocol...

...this is left unchanged



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (      % (2)
    out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (3)
    in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                  % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                          % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                          % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (      % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
    in(chops(C1,C2)) ) ).
reaction( out(chops(C1,C2)), (operation, completion), (      % (1')
    out(chop(C1)), out(chop(C2)) ) ).
reaction( in(chops(C1,C2)), (operation, invocation), (        % (2)
    out(required(C1,C2)) ) ).
reaction( in(chops(C1,C2)), (operation, completion), (        % (3)
    in(required(C1,C2)) ) ).
reaction( out(required(C1,C2)), internal, (                    % (4)
    in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) ) ).
reaction( out(chop(C)), internal, (                             % (5)
    rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) ) ).
reaction( out(chop(C)), internal, (                             % (5')
    rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) ) ).
reaction( in(chops(C1,C2)), (operation, completion), (         % (6)
    current_time(T), rd(max eating time(Max)), T1 is T + Max,
    out(used(C1,C2,T)),
    out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) ) ).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
  in(chops(C1,C2)) )).
reaction( out(chops(C1,C2)), (operation, completion), (      % (1')
  in(used(C1,C2,_)), out(chop(C1)), out(chop(C2)) )).
reaction( in(chops(C1,C2)), (operation, invocation), (        % (2)
  out(required(C1,C2)) )).
reaction( in(chops(C1,C2)), (operation, completion), (        % (3)
  in(required(C1,C2)) )).
reaction( out(required(C1,C2)), internal, (                    % (4)
  in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) )).
reaction( out(chop(C)), internal, (                             % (5)
  rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) )).
reaction( out(chop(C)), internal, (                             % (5')
  rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) )).
reaction( in(chops(C1,C2)), (operation, completion), (         % (6)
  current_time(T), rd(max eating time(Max)), T1 is T + Max,
  out(used(C1,C2,T)),
  out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) )).

```



Timed Dining Philosophers: table A&A ReSpecT Code

```

reaction( out(chops(C1,C2)), (operation, completion), (      % (1)
  in(chops(C1,C2)) ) ).
reaction( out(chops(C1,C2)), (operation, completion), (      % (1')
  in(used(C1,C2,_)), out(chop(C1)), out(chop(C2)) ) ).
reaction( in(chops(C1,C2)), (operation, invocation), (        % (2)
  out(required(C1,C2)) ) ).
reaction( in(chops(C1,C2)), (operation, completion), (        % (3)
  in(required(C1,C2)) ) ).
reaction( out(required(C1,C2)), internal, (                    % (4)
  in(chop(C1)), in(chop(C2)), out(chops(C1,C2)) ) ).
reaction( out(chop(C)), internal, (                             % (5)
  rd(required(C,C2)), in(chop(C)), in(chop(C2)), out(chops(C,C2)) ) ).
reaction( out(chop(C)), internal, (                             % (5')
  rd(required(C1,C)), in(chop(C1)), in(chop(C)), out(chops(C1,C)) ) ).
reaction( in(chops(C1,C2)), (operation, completion), (        % (6)
  current_time(T), rd(max eating time(Max)), T1 is T + Max,
  out(used(C1,C2,T)),
  out_s(time(T1), (in(used(C1,C2,T)), out(chop(C1)), out(chop(C2)))) ) ).

```



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Timed Dining Philosophers in A&A ReSpecT: Results

Results

protocol no deadlock

protocol fairness

protocol trivial philosopher's interaction protocol

tuple centre shared resources handled properly

tuple centre no starvation



Outline

1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = \text{mgu}(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = \text{mgu}(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = mgu(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form `reaction(E, G, R)`
 - if event *Ev* occurs in the tuple centre,
 - which matches event descriptor *E* such that $\theta = mgu(E, Ev)$, and
 - guard *G* is true,
 - then reaction *R* θ to *Ev* is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = mgu(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = mgu(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = \text{mgu}(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = mgu(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Basic Syntax for Reactions

Logic Tuples

- A&A ReSpecT tuple centres adopt logic tuples for both ordinary tuples and specification tuples
- ordinary tuples are simple first-order logic (FOL) facts, written with a Prolog syntax
 - while ordinary logic tuples are typically ground facts, there is nothing to constrain them to be such
- specification tuples are logic tuples of the form $\text{reaction}(E, G, R)$
 - if event Ev occurs in the tuple centre,
 - which matches event descriptor E such that $\theta = mgu(E, Ev)$, and
 - guard G is true,
 - then reaction $R\theta$ to Ev is triggered for execution in the tuple centre



A&A ReSpecT Core Syntax

```

⟨TCSpecification⟩ ::= {⟨Specification Tuple⟩ . }
⟨Specification Tuple⟩ ::= reaction(⟨SimpleTCEvent⟩, [[⟨Guard⟩],] ⟨Reaction⟩)
⟨SimpleTCEvent⟩ ::= ⟨SimpleTCPredicate⟩ (⟨Tuple⟩) | time(⟨Time⟩)
  ⟨Guard⟩ ::= ⟨GuardPredicate⟩ | (⟨GuardPredicate⟩ {, ⟨GuardPredicate⟩})
  ⟨Reaction⟩ ::= ⟨ReactionGoal⟩ | (⟨ReactionGoal⟩ {, ⟨ReactionGoal⟩})
  ⟨ReactionGoal⟩ ::= ⟨TCPredicate⟩ (⟨Tuple⟩) | ⟨ObservationPredicate⟩ (⟨Tuple⟩) |
    ⟨Computation⟩ | (⟨ReactionGoal⟩ ; ⟨ReactionGoal⟩)
  ⟨TCPredicate⟩ ::= ⟨SimpleTCPredicate⟩ | ⟨TCLinkPredicate⟩
  ⟨TCLinkPredicate⟩ ::= ⟨TCIdentifier⟩ ? ⟨SimpleTCPredicate⟩
  ⟨SimpleTCPredicate⟩ ::= ⟨TCStatePredicate⟩ | ⟨TCForgePredicate⟩
  ⟨TCStatePredicate⟩ ::= in | inp | rd | rdp | out | no | get | set
  ⟨TCForgePredicate⟩ ::= ⟨TCStatePredicate⟩_s
  ⟨ObservationPredicate⟩ ::= ⟨EventView⟩_⟨EventInformation⟩
    ⟨EventView⟩ ::= current | event | start
  ⟨EventInformation⟩ ::= predicate | tuple | source | target | time
  ⟨GuardPredicate⟩ ::= request | response | success | failure | endo | exo |
    intra | inter | from_agent | to_agent | from_tc | to_tc |
    before(⟨Time⟩) | after(⟨Time⟩)

    ⟨Time⟩ is a non-negative integer
    ⟨Tuple⟩ is Prolog term
    ⟨Computation⟩ is a Prolog-like goal performing arithmetic / logic computations
    ⟨TCIdentifier⟩ ::= ⟨TCName⟩ @ ⟨NetworkLocation⟩
    ⟨TCName⟩ is a Prolog ground term
    ⟨NetworkLocation⟩ is a Prolog string representing either an IP name or a DNS entry

```



A&A ReSpecT Behaviour Specification

Behaviour Specification

$$\begin{aligned} \langle TCSpecification \rangle &::= \{ \langle SpecificationTuple \rangle . \} \\ \langle SpecificationTuple \rangle &::= \text{reaction} (\\ &\quad \langle SimpleTCEvent \rangle , \\ &\quad [\langle Guard \rangle ,] \\ &\quad \langle Reaction \rangle \\ &\quad) \end{aligned}$$

- a behaviour specification $\langle TCSpecification \rangle$ is a logic theory of FOL tuples `reaction/3`
- a specification tuple contains an event descriptor $\langle SimpleTCEvent \rangle$, a guard $\langle Guard \rangle$ (optional), and a sequence $\langle Reaction \rangle$ of reaction goals
 - a `reaction/2` specification tuple implicitly defines an empty guard



A&A ReSpecT Behaviour Specification

Behaviour Specification

$$\begin{aligned} \langle TCSpecification \rangle &::= \{ \langle SpecificationTuple \rangle . \} \\ \langle SpecificationTuple \rangle &::= \text{reaction}(\langle SimpleTCEvent \rangle, \\ &\quad [\langle Guard \rangle,] \\ &\quad \langle Reaction \rangle \\ &\quad) \end{aligned}$$

- a behaviour specification $\langle TCSpecification \rangle$ is a logic theory of FOL tuples `reaction/3`
- a specification tuple contains an event descriptor $\langle SimpleTCEvent \rangle$, a guard $\langle Guard \rangle$ (optional), and a sequence $\langle Reaction \rangle$ of reaction goals
 - a `reaction/2` specification tuple implicitly defines an empty guard



A&A ReSpecT Behaviour Specification

Behaviour Specification

$$\begin{aligned} \langle TCSpecification \rangle &::= \{ \langle SpecificationTuple \rangle . \} \\ \langle SpecificationTuple \rangle &::= \text{reaction} (\\ &\quad \langle SimpleTCEvent \rangle , \\ &\quad [\langle Guard \rangle ,] \\ &\quad \langle Reaction \rangle \\ &\quad) \end{aligned}$$

- a behaviour specification $\langle TCSpecification \rangle$ is a logic theory of FOL tuples `reaction/3`
- a specification tuple contains an event descriptor $\langle SimpleTCEvent \rangle$, a guard $\langle Guard \rangle$ (optional), and a sequence $\langle Reaction \rangle$ of reaction goals
 - a `reaction/2` specification tuple implicitly defines an empty guard



A&A ReSpecT Behaviour Specification

Behaviour Specification

$$\begin{aligned} \langle TCSpecification \rangle &::= \{ \langle SpecificationTuple \rangle . \} \\ \langle SpecificationTuple \rangle &::= \text{reaction} (\\ &\quad \langle SimpleTCEvent \rangle , \\ &\quad [\langle Guard \rangle ,] \\ &\quad \langle Reaction \rangle \\ &\quad) \end{aligned}$$

- a behaviour specification $\langle TCSpecification \rangle$ is a logic theory of FOL tuples `reaction/3`
- a specification tuple contains an event descriptor $\langle SimpleTCEvent \rangle$, a guard $\langle Guard \rangle$ (optional), and a sequence $\langle Reaction \rangle$ of reaction goals
 - a `reaction/2` specification tuple implicitly defines an empty guard



A&A ReSpecT Event Descriptor

Event Descriptor

$$\langle SimpleTCEvent \rangle ::= \langle SimpleTCPredicate \rangle (\langle Tuple \rangle) \mid \text{time}(\langle Time \rangle)$$

- an event descriptor $\langle SimpleTCEvent \rangle$ is either the invocation of a primitive $\langle SimpleTCPredicate \rangle (\langle Tuple \rangle)$ or a time event $\text{time}(\langle Time \rangle)$
 - more generally, a time event could become the descriptor of an environment-related event
- an event descriptor $\langle SimpleTCEvent \rangle$ is used to match with with *admissible A&A events*



A&A ReSpecT Event Descriptor

Event Descriptor

$$\langle \text{SimpleTCEvent} \rangle ::= \langle \text{SimpleTCPredicate} \rangle (\langle \text{Tuple} \rangle) \mid \text{time}(\langle \text{Time} \rangle)$$

- an event descriptor $\langle \text{SimpleTCEvent} \rangle$ is either the invocation of a primitive $\langle \text{SimpleTCPredicate} \rangle (\langle \text{Tuple} \rangle)$ or a time event $\text{time}(\langle \text{Time} \rangle)$
 - more generally, a time event could become the descriptor of an environment-related event
- an event descriptor $\langle \text{SimpleTCEvent} \rangle$ is used to match with with *admissible A&A events*



A&A ReSpecT Event Descriptor

Event Descriptor

$$\langle SimpleTCEvent \rangle ::= \langle SimpleTCPredicate \rangle (\langle Tuple \rangle) \mid \text{time}(\langle Time \rangle)$$

- an event descriptor $\langle SimpleTCEvent \rangle$ is either the invocation of a primitive $\langle SimpleTCPredicate \rangle (\langle Tuple \rangle)$ or a time event $\text{time}(\langle Time \rangle)$
 - more generally, a time event could become the descriptor of an environment-related event
- an event descriptor $\langle SimpleTCEvent \rangle$ is used to match with with *admissible A&A events*



A&A ReSpecT Event Descriptor

Event Descriptor

$$\langle SimpleTCEvent \rangle ::= \langle SimpleTCPredicate \rangle (\langle Tuple \rangle) \mid \text{time}(\langle Time \rangle)$$

- an event descriptor $\langle SimpleTCEvent \rangle$ is either the invocation of a primitive $\langle SimpleTCPredicate \rangle (\langle Tuple \rangle)$ or a time event $\text{time}(\langle Time \rangle)$
 - more generally, a time event could become the descriptor of an environment-related event
- an event descriptor $\langle SimpleTCEvent \rangle$ is used to match with with *admissible A&A events*



A&A ReSpecT Admissible Event

Admissible Event

$\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$
 $\langle AgentName \rangle$ is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Admissible Event

Admissible Event

$\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$
 $\langle AgentName \rangle$ is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Admissible Event

Admissible Event

```

 $\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$ 
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$ 
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$ 
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$ 
 $\langle AgentName \rangle$  is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$ 

```

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Admissible Event

Admissible Event

$\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$
 $\langle AgentName \rangle$ is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Admissible Event

Admissible Event

```

 $\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$ 
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$ 
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$ 
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$ 
 $\langle AgentName \rangle$  is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$ 

```

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Admissible Event

Admissible Event

$\langle GeneralTCEvent \rangle ::= \langle StartCause \rangle, \langle Cause \rangle, \langle TCCycleResult \rangle$
 $\langle StartCause \rangle, \langle Cause \rangle ::= \langle SimpleTCEvent \rangle, \langle Source \rangle, \langle Target \rangle, \langle Time \rangle$
 $\langle Source \rangle, \langle Target \rangle ::= \langle AgentIdentifier \rangle \mid \langle TCIdentifier \rangle$
 $\langle AgentIdentifier \rangle ::= \langle AgentName \rangle @ \langle NetworkLocation \rangle$
 $\langle AgentName \rangle$ is a Prolog ground term
 $\langle TCCycleResult \rangle ::= \perp \mid \{ \langle Tuple \rangle \}$

- an admissible A&A event descriptor includes its prime cause, its immediate cause, and the result of the tuple centre response
 - prime cause and immediate cause may coincide—such as when an agent invocation reaches its target tuple centre
 - or, they might be different—such as when a link primitive is invoked by a tuple centre reacting to an agent primitive invocation upon another tuple centre
- a reaction specification $\text{tuple_reaction}(E, G, R)$ and an admissible A&A event ϵ match if E unifies with $\epsilon. \langle Cause \rangle. \langle SimpleTCEvent \rangle$
- the result is undefined in the invocation stage, whereas it is defined in the completion stage



A&A ReSpecT Guards

Guards

$$\begin{aligned}
 \langle \textit{Guard} \rangle &::= \langle \textit{GuardPredicate} \rangle \mid \\
 &\quad (\langle \textit{GuardPredicate} \rangle \{ , \langle \textit{GuardPredicate} \rangle \}) \\
 \langle \textit{GuardPredicate} \rangle &::= \textit{request} \mid \textit{response} \mid \textit{success} \mid \textit{failure} \mid \\
 &\quad \textit{endo} \mid \textit{exo} \mid \textit{intra} \mid \textit{inter} \mid \\
 &\quad \textit{from_agent} \mid \textit{to_agent} \mid \textit{from_tc} \mid \textit{to_tc} \mid \\
 &\quad \textit{before}(\langle \textit{Time} \rangle) \mid \textit{after}(\langle \textit{Time} \rangle) \\
 \langle \textit{Time} \rangle &\text{ is a non-negative integer}
 \end{aligned}$$

- A triggered reaction is actually executed only if its guard is true
- All guard predicates are ground ones, so their have always a success / failure semantics
- Guard predicates concern properties of the event, so they can be used to further select some classes of events after the initial matching between the admissible event and the event descriptor



A&A ReSpecT Guards

Guards

```

⟨Guard⟩ ::= ⟨GuardPredicate⟩ |
           ( ⟨GuardPredicate⟩ {, ⟨GuardPredicate⟩} )

⟨GuardPredicate⟩ ::= request | response | success | failure |
                    endo | exo | intra | inter |
                    from_agent | to_agent | from_tc | to_tc |
                    before(⟨Time⟩) | after(⟨Time⟩)

⟨Time⟩ is a non-negative integer

```

- A triggered reaction is actually executed only if its guard is true
- All guard predicates are ground ones, so their have always a success / failure semantics
- Guard predicates concern properties of the event, so they can be used to further select some classes of events after the initial matching between the admissible event and the event descriptor



A&A ReSpecT Guards

Guards

$$\begin{aligned}
 \langle \textit{Guard} \rangle &::= \langle \textit{GuardPredicate} \rangle \mid \\
 &\quad (\langle \textit{GuardPredicate} \rangle \{ , \langle \textit{GuardPredicate} \rangle \}) \\
 \langle \textit{GuardPredicate} \rangle &::= \textit{request} \mid \textit{response} \mid \textit{success} \mid \textit{failure} \mid \\
 &\quad \textit{endo} \mid \textit{exo} \mid \textit{intra} \mid \textit{inter} \mid \\
 &\quad \textit{from_agent} \mid \textit{to_agent} \mid \textit{from_tc} \mid \textit{to_tc} \mid \\
 &\quad \textit{before}(\langle \textit{Time} \rangle) \mid \textit{after}(\langle \textit{Time} \rangle) \\
 \langle \textit{Time} \rangle &\text{ is a non-negative integer}
 \end{aligned}$$

- A triggered reaction is actually executed only if its guard is true
- All guard predicates are ground ones, so their have always a success / failure semantics
- Guard predicates concern properties of the event, so they can be used to further select some classes of events after the initial matching between the admissible event and the event descriptor



A&A ReSpecT Guards

Guards

$$\begin{aligned}
 \langle \textit{Guard} \rangle &::= \langle \textit{GuardPredicate} \rangle \mid \\
 &\quad (\langle \textit{GuardPredicate} \rangle \{ , \langle \textit{GuardPredicate} \rangle \}) \\
 \langle \textit{GuardPredicate} \rangle &::= \textit{request} \mid \textit{response} \mid \textit{success} \mid \textit{failure} \mid \\
 &\quad \textit{endo} \mid \textit{exo} \mid \textit{intra} \mid \textit{inter} \mid \\
 &\quad \textit{from_agent} \mid \textit{to_agent} \mid \textit{from_tc} \mid \textit{to_tc} \mid \\
 &\quad \textit{before}(\langle \textit{Time} \rangle) \mid \textit{after}(\langle \textit{Time} \rangle) \\
 \langle \textit{Time} \rangle &\text{ is a non-negative integer}
 \end{aligned}$$

- A triggered reaction is actually executed only if its guard is true
- All guard predicates are ground ones, so their have always a success / failure semantics
- Guard predicates concern properties of the event, so they can be used to further select some classes of events after the initial matching between the admissible event and the event descriptor



Semantics of Guard Predicates in A&A ReSpecT

Guard Predicates

Guard atom	True if
$Guard(\epsilon, (g, G))$	$Guard(\epsilon, g) \wedge Guard(\epsilon, G)$
$Guard(\epsilon, \text{endo})$	$\epsilon.Cause.Source = c$
$Guard(\epsilon, \text{exo})$	$\epsilon.Cause.Source \neq c$
$Guard(\epsilon, \text{intra})$	$\epsilon.Cause.Target = c$
$Guard(\epsilon, \text{inter})$	$\epsilon.Cause.Target \neq c$
$Guard(\epsilon, \text{from_agent})$	$\epsilon.Cause.Source \text{ is an agent}$
$Guard(\epsilon, \text{to_agent})$	$\epsilon.Cause.Target \text{ is an agent}$
$Guard(\epsilon, \text{from_tc})$	$\epsilon.Cause.Source \text{ is a tuple centre}$
$Guard(\epsilon, \text{to_tc})$	$\epsilon.Cause.Target \text{ is a tuple centre}$
$Guard(\epsilon, \text{before}(t))$	$\epsilon.Cause.Time < t$
$Guard(\epsilon, \text{after}(t))$	$\epsilon.Cause.Time > t$
$Guard(\epsilon, \text{request})$	$\epsilon.TCCycleResult \text{ is undefined}$
$Guard(\epsilon, \text{response})$	$\epsilon.TCCycleResult \text{ is defined}$
$Guard(\epsilon, \text{success})$	$\epsilon.TCCycleResult \neq \perp$
$Guard(\epsilon, \text{failure})$	$\epsilon.TCCycleResult = \perp$



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

request invocation, inv, req, pre

response completion, compl, resp, post

before(*Time*), after(*Time'*) between(*Time*, *Time'*)

from_agent, to_tc operation

from_tc, to_tc, endo, inter link_out

from_tc, to_tc, exo, intra link_in

from_tc, to_tc, endo, intra internal



$\langle \textit{GuardPredicate} \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

request invocation, inv, req, pre

response completion, compl, resp, post

before(*Time*), after(*Time'*) between(*Time*, *Time'*)

from_agent, to_tc operation

from_tc, to_tc, endo, inter link_out

from_tc, to_tc, exo, intra link_in

from_tc, to_tc, endo, intra internal



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



$\langle GuardPredicate \rangle$ aliases

Aliases for guard predicates

`request` invocation, `inv`, `req`, `pre`

`response` completion, `compl`, `resp`, `post`

`before(Time)`, `after(Time')` `between(Time, Time')`

`from_agent`, `to_tc` operation

`from_tc`, `to_tc`, `endo`, `inter` `link_out`

`from_tc`, `to_tc`, `exo`, `intra` `link_in`

`from_tc`, `to_tc`, `endo`, `intra` `internal`



A&A ReSpecT Reactions

Reactions

$$\langle \text{Reaction} \rangle ::= \langle \text{ReactionGoal} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle \{, \langle \text{ReactionGoal} \rangle\})$$

$$\langle \text{ReactionGoal} \rangle ::= \langle \text{TCPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{ObservationPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{Computation} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle ; \langle \text{ReactionGoal} \rangle)$$

$$\langle \text{TCPredicate} \rangle ::= \langle \text{SimpleTCPredicate} \rangle \mid \langle \text{TCLinkPredicate} \rangle$$

$$\langle \text{TCLinkPredicate} \rangle ::= \langle \text{TCIdentifier} \rangle ? \langle \text{SimpleTCPredicate} \rangle$$

- A reaction goal is either a primitive invocation (possibly, a link), a predicate recovering properties of the event, or some logic-based computation
- Sequences of reaction goals are executed transactionally with an overall success / failure semantics



A&A ReSpecT Reactions

Reactions

$$\langle \text{Reaction} \rangle ::= \langle \text{ReactionGoal} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle \{, \langle \text{ReactionGoal} \rangle\})$$

$$\langle \text{ReactionGoal} \rangle ::= \langle \text{TCPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{ObservationPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{Computation} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle ; \langle \text{ReactionGoal} \rangle)$$

$$\langle \text{TCPredicate} \rangle ::= \langle \text{SimpleTCPredicate} \rangle \mid \langle \text{TCLinkPredicate} \rangle$$

$$\langle \text{TCLinkPredicate} \rangle ::= \langle \text{TCIdentifier} \rangle ? \langle \text{SimpleTCPredicate} \rangle$$

- A reaction goal is either a primitive invocation (possibly, a link), a predicate recovering properties of the event, or some logic-based computation
- Sequences of reaction goals are executed transactionally with an overall success / failure semantics



A&A ReSpecT Reactions

Reactions

$$\langle \text{Reaction} \rangle ::= \langle \text{ReactionGoal} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle \{, \langle \text{ReactionGoal} \rangle\})$$

$$\langle \text{ReactionGoal} \rangle ::= \langle \text{TCPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{ObservationPredicate} \rangle (\langle \text{Tuple} \rangle) \mid$$

$$\langle \text{Computation} \rangle \mid$$

$$(\langle \text{ReactionGoal} \rangle ; \langle \text{ReactionGoal} \rangle)$$

$$\langle \text{TCPredicate} \rangle ::= \langle \text{SimpleTCPredicate} \rangle \mid \langle \text{TCLinkPredicate} \rangle$$

$$\langle \text{TCLinkPredicate} \rangle ::= \langle \text{TCIdentifier} \rangle ? \langle \text{SimpleTCPredicate} \rangle$$

- A reaction goal is either a primitive invocation (possibly, a link), a predicate recovering properties of the event, or some logic-based computation
- Sequences of reaction goals are executed transactionally with an overall success / failure semantics



A&A ReSpecT Tuple Centre Predicates

Tuple centre predicates

```

⟨SimpleTCPredicate⟩ ::= ⟨TCStatePredicate⟩ | ⟨TCForgePredicate⟩
⟨TCStatePredicate⟩ ::= in | inp | rd | rdp | out | no |
                        get | set
⟨TCForgePredicate⟩ ::= ⟨TCStatePredicate⟩_s
  
```

- Tuple centre predicates are uniformly used for agent invocations, internal operations, and link invocations
- The same predicates are substantially used for changing the specification state, with essentially the same semantics
 - *pred_s* invocations affect the specification state, and can be used within reactions, also as links
- *no* works as a test for absence, *get* and *set* work on the overall theory (either the one of ordinary tuples, or the one of specification tuples)



A&A ReSpecT Tuple Centre Predicates

Tuple centre predicates

```

⟨SimpleTCPredicate⟩ ::= ⟨TCStatePredicate⟩ | ⟨TCForgePredicate⟩
⟨TCStatePredicate⟩ ::= in | inp | rd | rdp | out | no |
                        get | set
⟨TCForgePredicate⟩ ::= ⟨TCStatePredicate⟩_s
  
```

- Tuple centre predicates are uniformly used for agent invocations, internal operations, and link invocations
- The same predicates are substantially used for changing the specification state, with essentially the same semantics
 - *pred_s* invocations affect the specification state, and can be used within reactions, also as links
- *no* works as a test for absence, *get* and *set* work on the overall theory (either the one of ordinary tuples, or the one of specification tuples)



A&A ReSpecT Tuple Centre Predicates

Tuple centre predicates

```

⟨SimpleTCPredicate⟩ ::= ⟨TCStatePredicate⟩ | ⟨TCForgePredicate⟩
⟨TCStatePredicate⟩ ::= in | inp | rd | rdp | out | no |
                        get | set
⟨TCForgePredicate⟩ ::= ⟨TCStatePredicate⟩_s
  
```

- Tuple centre predicates are uniformly used for agent invocations, internal operations, and link invocations
- The same predicates are substantially used for changing the specification state, with essentially the same semantics
 - *pred_s* invocations affect the specification state, and can be used within reactions, also as links
- *no* works as a test for absence, *get* and *set* work on the overall theory (either the one of ordinary tuples, or the one of specification tuples)



A&A ReSpecT Tuple Centre Predicates

Tuple centre predicates

$\langle \text{SimpleTCPredicate} \rangle ::= \langle \text{TCStatePredicate} \rangle \mid \langle \text{TCForgePredicate} \rangle$

$\langle \text{TCStatePredicate} \rangle ::= \text{in} \mid \text{inp} \mid \text{rd} \mid \text{rdp} \mid \text{out} \mid \text{no} \mid$
 $\text{get} \mid \text{set}$

$\langle \text{TCForgePredicate} \rangle ::= \langle \text{TCStatePredicate} \rangle_s$

- Tuple centre predicates are uniformly used for agent invocations, internal operations, and link invocations
- The same predicates are substantially used for changing the specification state, with essentially the same semantics
 - *pred_s* invocations affect the specification state, and can be used within reactions, also as links
- *no* works as a test for absence, *get* and *set* work on the overall theory (either the one of ordinary tuples, or the one of specification tuples)



A&A ReSpecT Tuple Centre Predicates

Tuple centre predicates

$$\langle \text{SimpleTCPredicate} \rangle ::= \langle \text{TCStatePredicate} \rangle \mid \langle \text{TCForgePredicate} \rangle$$

$$\langle \text{TCStatePredicate} \rangle ::= \text{in} \mid \text{inp} \mid \text{rd} \mid \text{rdp} \mid \text{out} \mid \text{no} \mid \\ \text{get} \mid \text{set}$$

$$\langle \text{TCForgePredicate} \rangle ::= \langle \text{TCStatePredicate} \rangle_s$$

- Tuple centre predicates are uniformly used for agent invocations, internal operations, and link invocations
- The same predicates are substantially used for changing the specification state, with essentially the same semantics
 - *pred_s* invocations affect the specification state, and can be used within reactions, also as links
- *no* works as a test for absence, *get* and *set* work on the overall theory (either the one of ordinary tuples, or the one of specification tuples)



A&A ReSpecT Observation Predicates

Observation predicates

$\langle \text{ObservationPredicate} \rangle ::= \langle \text{EventView} \rangle_ \langle \text{EventInformation} \rangle$

$\langle \text{EventView} \rangle ::= \text{current} \mid \text{event} \mid \text{start}$

$\langle \text{EventInformation} \rangle ::= \text{predicate} \mid \text{tuple} \mid$
 $\text{source} \mid \text{target} \mid \text{time}$

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- $\langle \text{EventInformation} \rangle$ aliases

predicate pred, call; *deprecated*: operation, op
 tuple arg
 source from
 target to



A&A ReSpecT Observation Predicates

Observation predicates

$\langle \text{ObservationPredicate} \rangle ::= \langle \text{EventView} \rangle_ \langle \text{EventInformation} \rangle$

$\langle \text{EventView} \rangle ::= \text{current} \mid \text{event} \mid \text{start}$

$\langle \text{EventInformation} \rangle ::= \text{predicate} \mid \text{tuple} \mid$
 $\text{source} \mid \text{target} \mid \text{time}$

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- $\langle \text{EventInformation} \rangle$ aliases

predicate pred, call; deprecated: operation, op

tuple arg

source from

target to



A&A ReSpecT Observation Predicates

Observation predicates

$\langle \text{ObservationPredicate} \rangle ::= \langle \text{EventView} \rangle_ \langle \text{EventInformation} \rangle$

$\langle \text{EventView} \rangle ::= \text{current} \mid \text{event} \mid \text{start}$

$\langle \text{EventInformation} \rangle ::= \text{predicate} \mid \text{tuple} \mid$
 $\text{source} \mid \text{target} \mid \text{time}$

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- $\langle \text{EventInformation} \rangle$ aliases

predicate pred, call; *deprecated*: operation, op
tuple arg
source from
target to



A&A ReSpecT Observation Predicates

Observation predicates

```

<ObservationPredicate> ::= <EventView>_<EventInformation>
    <EventView> ::= current | event | start
    <EventInformation> ::= predicate | tuple |
                        source | target | time
  
```

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- <EventInformation> aliases
 - `predicate` pred, call; *deprecated*: operation, op
 - `tuple` arg
 - `source` from
 - `target` to



A&A ReSpecT Observation Predicates

Observation predicates

```

<ObservationPredicate> ::= <EventView>_<EventInformation>
    <EventView> ::= current | event | start
    <EventInformation> ::= predicate | tuple |
                        source | target | time
  
```

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- <EventInformation> aliases
 - `predicate` pred, call; *deprecated*: operation, op
 - `tuple` arg
 - `source` from
 - `target` to



A&A ReSpecT Observation Predicates

Observation predicates

```

<ObservationPredicate> ::= <EventView>_<EventInformation>
    <EventView> ::= current | event | start
    <EventInformation> ::= predicate | tuple |
                          source | target | time
  
```

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- <EventInformation> aliases
 - `predicate` pred, call; *deprecated*: operation, op
 - `tuple` arg
 - `source` from
 - `target` to



A&A ReSpecT Observation Predicates

Observation predicates

$\langle \text{ObservationPredicate} \rangle ::= \langle \text{EventView} \rangle_ \langle \text{EventInformation} \rangle$

$\langle \text{EventView} \rangle ::= \text{current} \mid \text{event} \mid \text{start}$

$\langle \text{EventInformation} \rangle ::= \text{predicate} \mid \text{tuple} \mid$
 $\text{source} \mid \text{target} \mid \text{time}$

- event & start clearly refer to immediate and prime cause, respectively—current refers to what is currently happening, whenever this means something useful
- $\langle \text{EventInformation} \rangle$ aliases
 predicate pred, call; *deprecated*: operation, op
 tuple arg
 source from
 target to



Semantics of Observation Predicates

$$\langle (r, R), Tu, \Sigma, Re, Out \rangle_{\epsilon} \longrightarrow_e \langle R\theta, Tu, \Sigma, Re, Out \rangle_{\epsilon}$$

r	where
<code>event_predicate(0bs)</code>	$\theta = mgu(\epsilon.Cause.SimpleTCEvent.SimpleTCPredicate, 0bs)$
<code>event_tuple(0bs)</code>	$\theta = mgu(\epsilon.Cause.SimpleTCEvent.Tuple, 0bs)$
<code>event_source(0bs)</code>	$\theta = mgu(\epsilon.Cause.Source, 0bs)$
<code>event_target(0bs)</code>	$\theta = mgu(\epsilon.Cause.Target, 0bs)$
<code>event_time(0bs)</code>	$\theta = mgu(\epsilon.Cause.Time, 0bs)$
<code>start_predicate(0bs)</code>	$\theta = mgu(\epsilon.StartCause.SimpleTCEvent.SimpleTCPredicate, 0bs)$
<code>start_tuple(0bs)</code>	$\theta = mgu(\epsilon.StartCause.SimpleTCEvent.Tuple, 0bs)$
<code>start_source(0bs)</code>	$\theta = mgu(\epsilon.StartCause.Source, 0bs)$
<code>start_target(0bs)</code>	$\theta = mgu(\epsilon.StartCause.Target, 0bs)$
<code>start_time(0bs)</code>	$\theta = mgu(\epsilon.StartCause.Time, 0bs)$
<code>current_predicate(0bs)</code>	$\theta = mgu(current_predicate, 0bs)$
<code>current_tuple(0bs)</code>	$\theta = mgu(0bs, 0bs) = \{\}$
<code>current_source(0bs)</code>	$\theta = mgu(c, 0bs)$
<code>current_target(0bs)</code>	$\theta = mgu(c, 0bs)$
<code>current_time(0bs)</code>	$\theta = mgu(nc, 0bs)$



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)

ReSpecT: Language & Semantics



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - (not) controllable
 - malleable
 - (linkable)
 - (situated)



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Re-interpreting ReSpecT

- ReSpecT tuple centres as coordination artifacts
 - tuple centres as social artifacts
 - tuple centres as individual artifacts?
 - tuple centres as environment artifacts?
- ReSpecT tuple centres
 - encapsulate knowledge in terms of logic tuples
 - encapsulates behaviour in terms of ReSpecT specifications
- A&A ReSpecT tuple centres are
 - inspectable
 - not controllable
 - malleable
 - (linkable)
 - (situated)
 - time, up to now



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples

tuple space ordinary (logic) tuples

- for knowledge, information, messages, communication
- working as the (logic) *theory of communication* for MAS

specification space specification (logic, ReSpecT) tuples

- for behaviour, function, coordination
- working as the (logic) *theory of coordination* for MAS

- Both spaces are inspectable

- by MAS engineers, via ReSpecT inspectors
- by agents, via rd & no primitives

the rd & no for the tuple space, rd & no for the specification space
 the rd & no inspect directly, or indirectly, through either a coordination primitive, or
 a tuple centre, or a specification centre



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS

specification space specification (logic, ReSpecT) tuples

- Both spaces are inspectable

- by MAS engineers, via ReSpecT inspectors
- by agents, via rd & no primitives

• rd & no for the tuple space & no for the specification space
 • rd & no directly on knowledge, messages & communication
 • rd & no on the specification space



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives

Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space** ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space** specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via *rd* & *no* primitives



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives
 - rd & no for the tuple space; rd.s & no.s for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives
 - rd & no for the tuple space; rd.s & no.s for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space** ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space** specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via `rd` & `no` primitives
 - `rd` & `no` for the tuple space; `rd_s` & `no_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space** ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space** specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via `rd` & `no` primitives
 - `rd` & `no` for the tuple space; `rd_s` & `no_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Inspectability of A&A ReSpecT Tuple Centres

- A&A ReSpecT tuple centres: twofold space for tuples
 - tuple space ordinary (logic) tuples
 - for knowledge, information, messages, communication
 - working as the (logic) *theory of communication* for MAS
 - specification space specification (logic, ReSpecT) tuples
 - for behaviour, function, coordination
 - working as the (logic) *theory of coordination* for MAS
- Both spaces are inspectable
 - by MAS engineers, via ReSpecT inspectors
 - by agents, via rd & no primitives
 - rd & no for the tuple space; rd_s & no_s for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
 - A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via in & out primitives
- MAS can interact for the tuple space, in & out tuples for the tuple space, and change the specification space
- MAS can interact as independently, through a tuple space specification



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via *in* & *out* primitives

• The ReSpecT tuple centre is a *black box* for the MAS engineers, who can adapt it by changing its specification space

• The ReSpecT tuple centre is a *black box* for the agents, who can adapt it by changing its specification space

• The ReSpecT tuple centre is a *black box* for the agents, who can adapt it by changing its specification space



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via `in` & `out` primitives
 - `in` & `out` for the tuple space; `in_s` & `out_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via *in* & *out* primitives
 - *in* & *out* for the tuple space; *in_s* & *out_s* for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via `in` & `out` primitives
 - `in` & `out` for the tuple space; `in_s` & `out_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via `in` & `out` primitives
 - `in` & `out` for the tuple space; `in_s` & `out_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Malleability of A&A ReSpecT Tuple Centres

- The behaviour of a ReSpecT tuple centre is defined by the ReSpecT tuples in the specification space
 - it can be adapted / changed by changing its ReSpecT specification
- A&A ReSpecT tuple centres are malleable
 - by MAS engineers, via ReSpecT tools
 - by agents, via `in` & `out` primitives
 - `in` & `out` for the tuple space; `in_s` & `out_s` for the specification space
 - either directly or indirectly, through either a coordination primitive, or another artifact / tuple centre



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_a
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - $\langle TCIdentifier \rangle @ \langle NetworkLocation \rangle ? \langle SimpleTCPredicate \rangle$
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_a
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - $\langle TCIdentifier \rangle @ \langle NetworkLocation \rangle ? \langle SimpleTCPredicate \rangle$
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_a
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - $\langle TCIdentifier \rangle @ \langle NetworkLocation \rangle ? \langle SimpleTCPredicate \rangle$
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 - *< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >*
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions
 $\langle TCIdentifier \rangle @ \langle NetworkLocation \rangle ? \langle SimpleTCPredicate \rangle$
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions

< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



Linkability of A&A ReSpecT Tuple Centres

- Every tuple centre coordination primitive is also an A&A ReSpecT primitive for reaction goals, and a primitive for linking, too
 - all primitives are asynchronous
 - so they do not affect the transactional semantics of reactions
 - all primitives have a request / response semantics
 - including out / out_s
 - so reactions can be defined to handle both primitive invocations & completions
 - all primitives could be executed within a A&A ReSpecT reaction
 - as either a reaction goal executed within the same tuple centre
 - or as a link primitive invoked upon another tuple centre
- A&A ReSpecT tuple centres are linkable
 - by using tuple centre identifiers within ReSpecT reactions

< TCIdentifier > @ < NetworkLocation >? < SimpleTCPredicate >
 - any A&A ReSpecT reaction can invoke any coordination primitive upon any tuple centre in the network



1 Introduction to (Tuple-based) Coordination

- Coordination: A Meta-model
- Tuple-based Coordination & Linda

2 ReSpecT: Programming Tuple Spaces

- Hybrid Coordination Models
- Tuple Centres
- Dining Philosophers with A&A ReSpecT
- A&A ReSpecT: Language & Semantics



Bibliography I



Arbab, F. (2004).

Reo: A channel-based coordination model for component composition.

Mathematical Structures in Computer Science, 14:329–366.



Ciancarini, P. (1996).

Coordination models and languages as software integrators.

ACM Computing Surveys, 28(2):300–302.



Dastani, M., Arbab, F., and de Boer, F. S. (2005).

Coordination and composition in multi-agent systems.

In Dignum, F., Dignum, V., Koenig, S., Kraus, S., Singh, M. P., and Wooldridge, M. J., editors, *4rd International Joint Conference on Autonomous Agents and Multiagent Systems (AAMAS 2005)*, pages 439–446, Utrecht, The Netherlands. ACM.



Dijkstra, E. W. (2002).

Co-operating sequential processes.

In Hansen, P. B., editor, *The Origin of Concurrent Programming: From Semaphores to Remote Procedure Calls*, chapter 2, pages 65–138. Springer.

Reprinted. 1st edition: 1965.



Bibliography II



Gelernter, D. (1985).

Generative communication in Linda.

ACM Transactions on Programming Languages and Systems, 7(1):80–112.



Gelernter, D. and Carriero, N. (1992).

Coordination languages and their significance.

Communications of the ACM, 35(2):97–107.



Omicini, A. and Denti, E. (2001).

From tuple spaces to tuple centres.

Science of Computer Programming, 41(3):277–294.



Omicini, A., Ricci, A., and Viroli, M. (2005).

Time-aware coordination in ReSpecT.

In Jacquet, J.-M. and Picco, G. P., editors, *Coordination Models and Languages*, volume 3454 of *LNCS*, pages 268–282. Springer-Verlag.

7th International Conference (COORDINATION 2005), Namur, Belgium, 20–23 April 2005. Proceedings.



Tuple-based Coordination: From Linda to A&A ReSpecT

Advanced Topics in Agent-Oriented Computing

Andrea Omicini
`andrea.omicini@unibo.it`

ALMA MATER STUDIORUM—Università di Bologna a Cesena

ICT International Doctorate School, Trento, Italy, 2007

